

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	855.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of I _{max}	109.9V x 109.8H
	At 50% of I _{max}	59.7V x 62.2H
	At 90% of I _{max}	21.0V x 21.6H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of I _{max}	921.6 lumens per klm.
	To 50% of I _{max}	536.8 lumens per klm.
	To 90% of I _{max}	85.6 lumens per klm.

Upward LOR	0.1 %
Downward LOR	99.9 %

Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:13.9DEG
Operators:CS01
Test Date:2023-08-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
Humidity:38.0%
Test Distance:1.917m [K=1.0000]
Remarks: TG-213M-60W-16(3535 40K RA80 TS60)

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.25V I:0.2771A P:57.118W PF:0.9318 Freq:50.01Hz Lamp Flux:4290.18x1 lm		
NAME: TG-213M-60W-16	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLED	SUR.:	Shielding Angle:

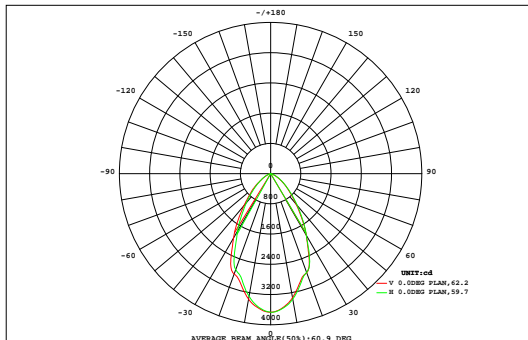

DATA OF LAMP		Eff:75.11lm/W	
MODEL 3535	40K RA80 TS60	Imax(cd)	3669
NOMINAL POWER(W)	60	AVAILABILITY(%)	92.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	3954
NOMINAL FLUX(lm)	4290.18	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	4290
TEST VOLTAGE(V)	220	θ @50%(H,V)	62,60DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
	0.00	0.02	0.04	0.07	0.09	0.10	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.99	0.00
90																				
80	0.01	0.04	0.09	0.15	0.32	0.59	0.86	1.05	1.14	1.14	1.05	0.85	0.54	0.26	0.10	0.04	0.02	0.00	8.26	0.00
70	0.01	0.06	0.15	0.49	1.19	2.14	3.18	4.00	4.38	4.39	4.01	3.15	2.06	1.10	0.43	0.10	0.03	0.00	30.9	0.00
60	0.01	0.07	0.33	1.17	2.80	5.11	7.62	9.51	10.6	10.6	9.52	7.61	4.99	2.68	1.09	0.28	0.04	0.01	74.1	19.0
50	0.02	0.10	0.62	2.20	5.29	9.37	14.5	18.9	21.6	21.6	18.9	14.5	9.24	5.02	2.10	0.55	0.07	0.01	145	120
40	0.02	0.14	0.98	3.53	8.32	15.5	24.9	34.6	40.3	40.3	34.7	25.1	15.6	8.01	3.29	0.90	0.11	0.01	256	241
30	0.02	0.19	1.34	4.79	11.5	22.8	38.6	56.3	66.9	67.0	56.7	39.3	23.2	11.4	4.39	1.27	0.16	0.01	406	394
- 30	0.02	0.23	1.62	5.89	14.3	29.8	52.3	76.7	87.9	88.5	77.5	53.3	30.6	14.4	5.50	1.56	0.20	0.01	540	531
	0.02	0.25	1.76	6.56	16.2	34.9	63.0	86.2	104	104	87.0	64.4	36.3	16.7	6.31	1.73	0.23	0.01	629	620
	0.02	0.26	1.78	6.62	16.4	35.6	64.4	87.3	105	105	88.0	65.7	36.7	16.9	6.39	1.75	0.23	0.01	638	629
	0.02	0.24	1.67	6.04	14.8	31.3	55.2	79.2	90.5	90.8	79.4	55.4	31.5	14.9	5.71	1.61	0.21	0.01	559	549
	0.02	0.20	1.41	5.01	12.1	24.3	41.5	60.5	71.5	71.6	60.2	41.3	24.2	11.9	4.63	1.33	0.17	0.01	432	420
- 40	0.02	0.15	1.06	3.74	8.83	16.6	27.2	38.2	44.1	43.9	37.7	27.0	16.5	8.54	3.50	0.96	0.12	0.01	278	263
- 50	0.02	0.10	0.70	2.40	5.71	10.3	16.1	20.9	23.8	23.7	20.8	15.9	10.0	5.42	2.29	0.61	0.07	0.01	159	136
- 60	0.01	0.07	0.38	1.32	3.10	5.68	8.54	10.6	11.8	11.8	10.5	8.34	5.41	2.91	1.21	0.31	0.04	0.01	82.1	31.0
- 70	0.01	0.06	0.16	0.58	1.36	2.43	3.61	4.49	4.92	4.92	4.44	3.45	2.24	1.20	0.47	0.11	0.03	0.00	34.5	0.00
- 80	0.01	0.04	0.09	0.17	0.39	0.72	1.05	1.26	1.37	1.38	1.25	0.99	0.64	0.31	0.11	0.04	0.02	0.00	9.85	0.00
- 90	0.00	0.02	0.05	0.08	0.10	0.11	0.12	0.12	0.11	0.10	0.09	0.08	0.06	0.04	0.03	0.02	0.01	0.00	1.15	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.24	2.25	14.2	50.8	123	247	423	590	690	691	592	426	250	122	47.6	13.2	1.76	0.11	4284	---
Φ a	0.00	0.00	0.00	15.9	97.6	224	400	568	668	669	570	404	227	96.5	13.3	0.00	0.00	0.00	---	3954

one-half-peak spread: U:30.9,D:29.2 , L:30.9,R:31.7

NEMA Beam Type: Type 6


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:13.9DEG
Operators:CS01
Test Date:2023-08-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
Humidity:38.0%
Test Distance:1.917m [K=1.0000]
Remarks: TG-213M-60W-16(3535 40K RA80 TS60)

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:221.25V I:0.2771A P:57.118W PF:0.9318 Freq:50.01Hz Lamp Flux:4290.18x1 lm		
NAME: TG-213M-60W-16	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLED	SUR.:	Shielding Angle:

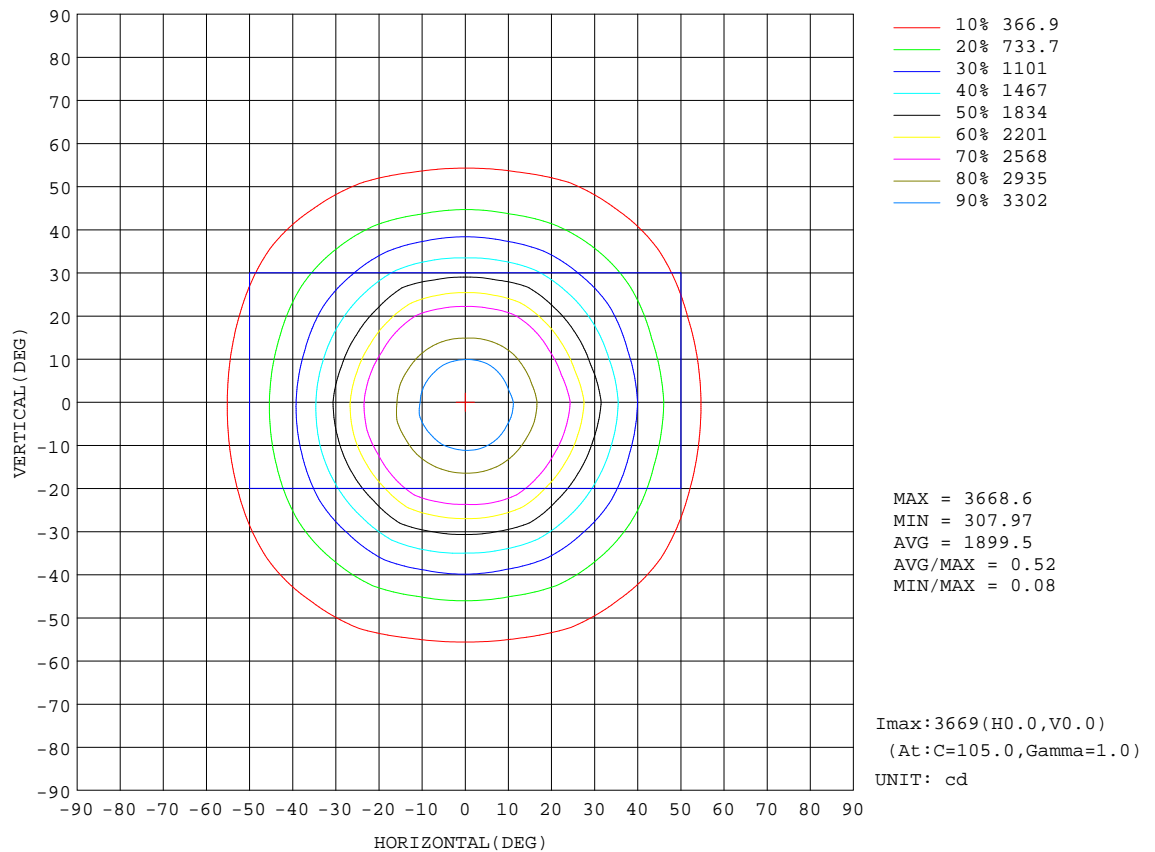


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 13.9DEG
Operators: CS01
Test Date: 2023-08-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
Humidity: 38.0%
Test Distance: 1.917m [K=1.0000]
Remarks: TG-213M-60W-16(3535 40K RA80 TS60)

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM


Test:U:221.25V I:0.2771A P:57.118W PF:0.9318 Freq:50.01Hz Lamp Flux:4290.18x1 lm		
NAME: TG-213M-60W-16	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLED	SUR.:	Shielding Angle:

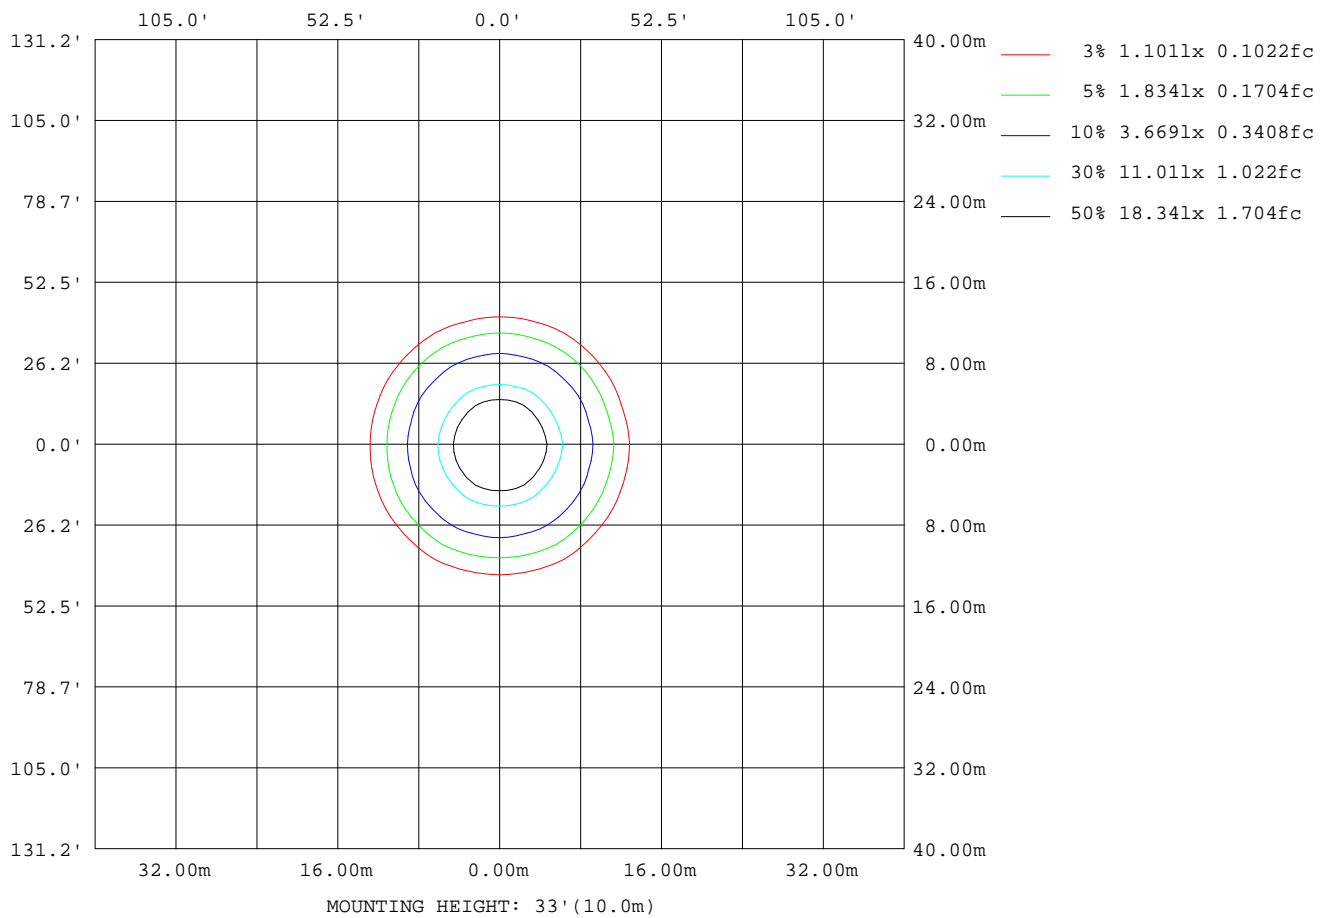

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:13.9DEG
Operators:CS01
Test Date:2023-08-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
Humidity:38.0%
Test Distance:1.917m [K=1.0000]
Remarks: TG-213M-60W-16(3535 40K RA80 TS60)

Planar Illuminance Curve

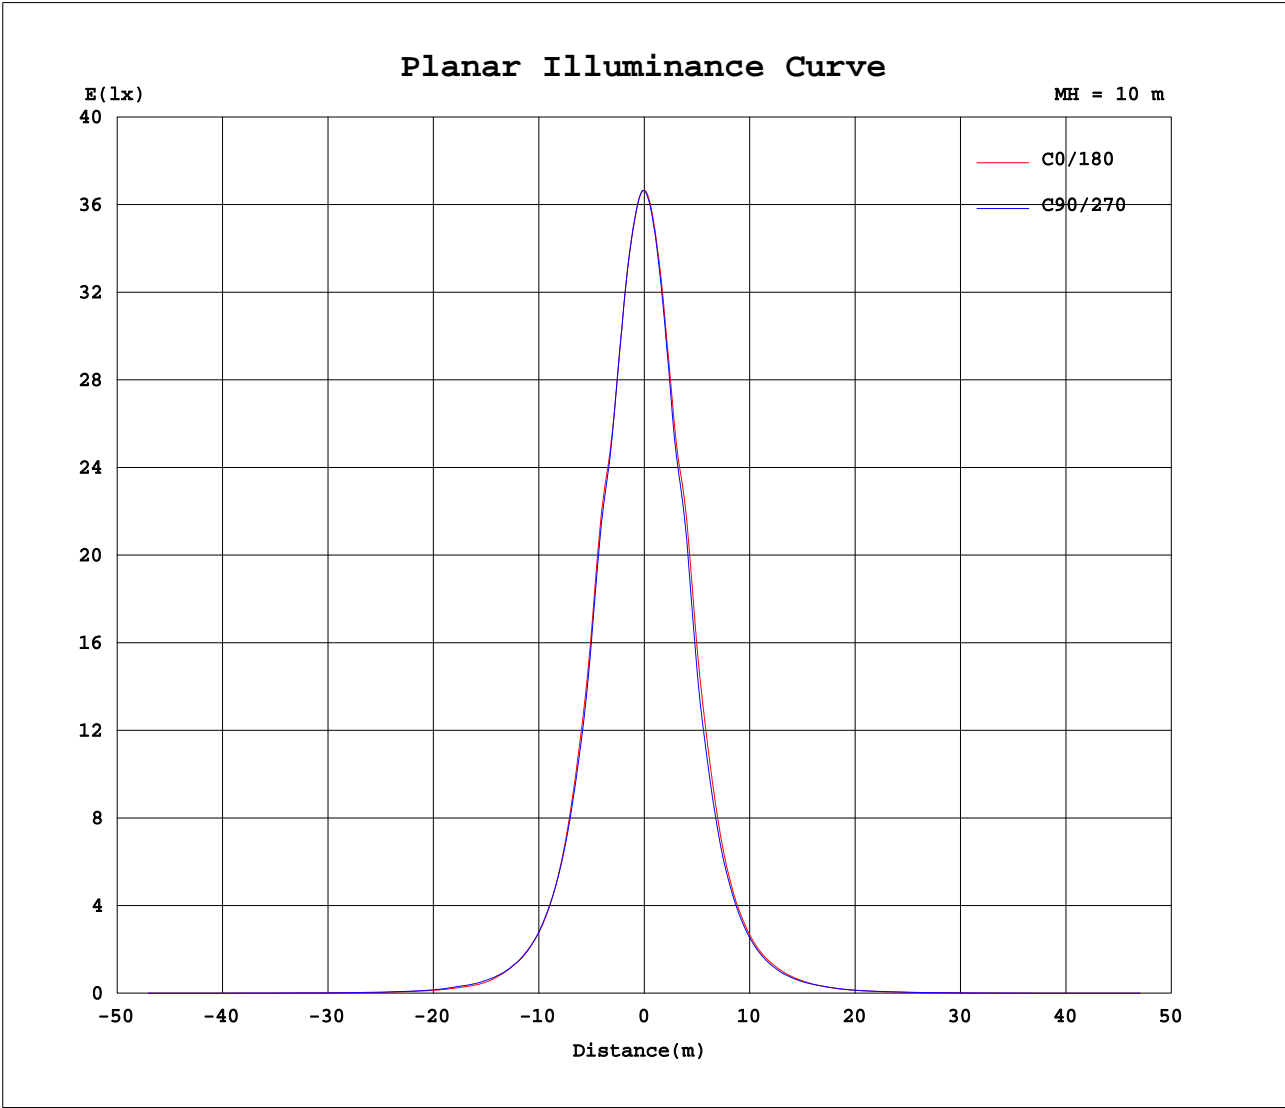


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:13.9DEG
Operators:CS01
Test Date:2023-08-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
Humidity:38.0%
Test Distance:1.917m [K=1.0000]
Remarks: TG-213M-60W-16(3535 40K RA80 TS60)

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:221.25V I:0.2771A P:57.118W PF:0.9318 Freq:50.01Hz Lamp Flux:4290.18x1 lm		
NAME: TG-213M-60W-16	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: KLED	SUR.:	Shielding Angle:

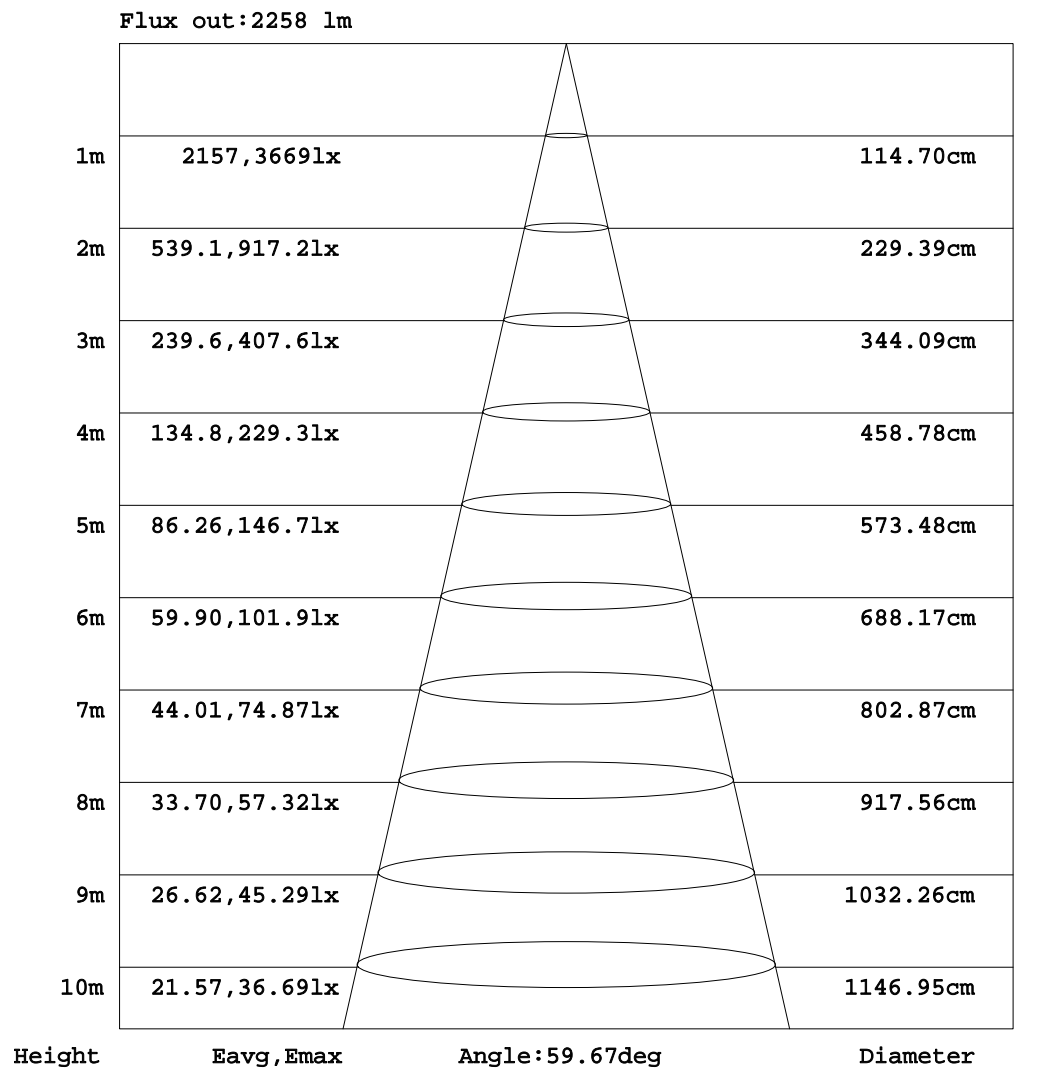

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:13.9DEG
 Operators:CS01
 Test Date:2023-08-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
 Humidity:38.0%
 Test Distance:1.917m [K=1.0000]
 Remarks: TG-213M-60W-16(3535 40K RA80 TS60)

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.25V I:0.2771A P:57.118W PF:0.9318 Freq:50.01Hz Lamp Flux:4290.18x1 lm																	
NAME: TG-213M-60W-16									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: KLED									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

H(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
V(DEC)	-180	-170	-160	-150	-140	-130	-120	-110	-100	-90	-80	-70	-60	-50	-40	-30	-20	-10	0
-180	0.64	0.37	0.36	0.21	0.25	0.40	0.60	0.85	1.12	1.49	1.91	2.38	2.82	3.10	3.22	3.24	3.03	2.72	2.56
-170	0.64	0.36	0.33	0.22	0.24	0.35	0.50	0.67	0.83	0.98	1.10	1.14	1.33	1.57	1.75	1.79	1.81	1.85	1.95
-160	0.64	0.34	0.31	0.24	0.21	0.29	0.38	0.47	0.57	0.68	0.82	0.99	1.21	1.41	1.58	1.71	1.78	1.87	1.90
-150	0.64	0.33	0.28	0.24	0.19	0.24	0.30	0.38	0.48	0.57	0.67	0.83	1.01	1.17	1.29	1.40	1.49	1.55	1.58
-140	0.64	0.31	0.25	0.21	0.17	0.21	0.26	0.32	0.39	0.48	0.56	0.67	0.78	0.89	0.99	1.07	1.13	1.17	1.18
-130	0.64	0.30	0.23	0.17	0.15	0.18	0.22	0.26	0.31	0.36	0.41	0.47	0.53	0.60	0.65	0.69	0.73	0.75	0.76
-120	0.64	0.29	0.21	0.14	0.12	0.16	0.18	0.20	0.23	0.26	0.29	0.32	0.34	0.37	0.38	0.39	0.40	0.41	0.42
-110	0.64	0.29	0.19	0.11	0.10	0.11	0.13	0.18	0.19	0.21	0.22	0.23	0.24	0.24	0.24	0.24	0.24	0.23	0.22
-100	0.64	0.35	0.19	0.09	0.09	0.09	0.09	0.10	0.10	0.11	0.14	0.22	0.27	0.26	0.24	0.21	0.18	0.16	0.13
-90	0.64	0.72	0.80	0.87	0.99	1.11	1.22	1.34	1.45	1.57	1.49	1.41	1.32	1.17	1.02	0.88	0.67	0.46	0.25
-80	0.64	1.78	3.15	4.21	5.13	5.92	6.31	6.40	6.52	6.70	7.23	8.12	9.66	10.4	11.2	12.0	12.7	13.1	13.0
-70	0.64	3.00	4.84	6.65	7.37	8.23	10.0	16.1	26.3	38.1	47.3	56.0	66.1	74.9	79.5	83.7	87.2	89.3	89.5
-60	0.64	3.84	6.42	7.85	9.64	17.1	32.0	50.5	70.4	93.7	122	152	184	205	228	249	263	270	271
-50	0.64	4.43	7.40	9.32	17.9	38.6	65.4	101	144	194	255	306	365	426	474	508	533	551	554
-40	0.64	4.96	7.95	12.3	32.2	63.7	107	170	249	330	419	527	642	759	878	962	1021	1075	1093
-30	0.64	5.46	8.52	17.0	44.9	89.7	157	244	352	481	631	808	1005	1226	1472	1688	1804	1870	1889
-20	0.64	5.86	9.09	22.4	57.5	112	198	311	451	619	837	1112	1433	1760	2088	2495	2729	2768	2779
-10	0.64	6.10	9.51	25.6	64.7	126	222	358	522	720	989	1357	1760	2204	2660	2833	3090	3299	3374
0	0.64	6.16	9.66	26.0	65.3	128	230	372	544	754	1047	1433	1891	2394	2792	2991	3332	3568	3669
10	0.64	6.07	9.46	24.9	62.8	124	219	352	512	702	957	1301	1694	2094	2599	2780	3008	3217	3294
20	0.64	5.79	9.00	21.1	54.4	108	187	300	435	595	800	1054	1342	1659	1957	2330	2627	2696	2706
30	0.64	5.35	8.44	15.2	41.2	85.1	148	233	336	456	596	756	933	1131	1344	1549	1672	1735	1755
40	0.64	4.81	7.95	12.2	28.1	57.1	98.5	159	237	308	390	489	592	693	792	868	924	975	997
50	0.64	4.26	7.36	9.02	15.0	33.1	58.5	89.0	131	180	231	276	328	379	423	455	480	500	508
60	0.64	3.71	6.10	7.85	9.07	15.1	27.1	43.8	62.9	83.2	108	135	161	184	200	218	231	238	239
70	0.64	2.87	4.43	6.17	7.33	8.02	8.72	13.8	21.2	30.8	40.3	48.4	57.6	64.7	69.0	72.9	75.3	76.1	75.4
80	0.64	1.57	2.90	3.72	4.36	5.24	5.95	6.21	6.38	6.50	6.59	7.00	8.09	8.43	8.76	9.05	9.39	9.49	9.30
90	0.64	0.65	0.66	0.67	0.59	0.51	0.43	0.54	0.65	0.75	0.74	0.73	0.71	0.65	0.59	0.53	0.49	0.44	0.39
100	0.64	0.42	0.38	0.37	0.21	0.08	0.06	0.12	0.28	0.37	0.43	0.51	0.55	0.53	0.51	0.49	0.45	0.41	0.38
110	0.64	0.38	0.31	0.08	0.27	0.37	0.37	0.41	0.39	0.36	0.28	0.26	0.27	0.28	0.29	0.30	0.29	0.28	0.27
120	0.64	0.38	0.19	0.36	0.36	0.36	0.28	0.22	0.27	0.33	0.40	0.46	0.53	0.60	0.65	0.69	0.72	0.74	0.74
130	0.64	0.36	0.27	0.36	0.34	0.20	0.24	0.32	0.43	0.56	0.70	0.85	1.01	1.16	1.29	1.40	1.49	1.54	1.57
140	0.64	0.33	0.36	0.35	0.21	0.23	0.34	0.48	0.64	0.83	1.06	1.33	1.60	1.85	2.08	2.27	2.42	2.51	2.55
150	0.64	0.33	0.37	0.33	0.20	0.30	0.44	0.62	0.83	1.09	1.42	1.80	2.19	2.57	2.84	3.10	3.26	3.34	3.34
160	0.64	0.34	0.36	0.29	0.22	0.35	0.53	0.73	0.98	1.31	1.71	2.16	2.60	2.99	3.25	3.46	3.57	3.60	3.61
170	0.64	0.35	0.36	0.23	0.24	0.39	0.58	0.82	1.10	1.45	1.87	2.33	2.76	3.08	3.27	3.37	3.35	3.30	3.22
180	0.64	0.37	0.36	0.21	0.25	0.40	0.60	0.85	1.12	1.49	1.91	2.38	2.82	3.10	3.22	3.24	3.03	2.72	2.54

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:13.9DEG
Operators:CS01
Test Date:2023-08-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
Humidity:38.0%
Test Distance:1.917m [K=1.0000]
Remarks: TG-213M-60W-16(3535 40K RA80 TS60)

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.25V I:0.2771A P:57.118W PF:0.9318 Freq:50.01Hz Lamp Flux:4290.18x1 lm																		
NAME: TG-213M-60W-16									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.: KLED									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
V(DEC)																			
-180	2.09	1.92	1.95	1.82	1.63	1.40	1.14	0.95	0.78	0.62	0.48	0.36	0.27	0.20	0.16	0.12	0.10	0.48	
-170	1.97	2.01	1.98	1.89	1.71	1.48	1.21	0.97	0.78	0.61	0.47	0.35	0.26	0.20	0.15	0.12	0.10	0.48	
-160	1.92	1.92	1.85	1.71	1.53	1.33	1.11	0.90	0.72	0.56	0.44	0.33	0.25	0.19	0.15	0.12	0.10	0.48	
-150	1.60	1.57	1.50	1.38	1.25	1.09	0.92	0.75	0.59	0.47	0.37	0.28	0.22	0.18	0.14	0.11	0.09	0.48	
-140	1.18	1.15	1.08	1.01	0.90	0.79	0.67	0.55	0.44	0.35	0.29	0.24	0.19	0.16	0.13	0.11	0.09	0.48	
-130	0.75	0.73	0.69	0.63	0.58	0.51	0.45	0.38	0.32	0.27	0.23	0.19	0.16	0.14	0.12	0.10	0.09	0.48	
-120	0.41	0.40	0.39	0.36	0.33	0.31	0.28	0.25	0.22	0.19	0.17	0.15	0.14	0.12	0.11	0.10	0.09	0.48	
-110	0.22	0.22	0.21	0.21	0.20	0.19	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.10	0.09	0.10	0.48	
-100	0.14	0.14	0.15	0.14	0.14	0.12	0.11	0.11	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.10	0.17	0.48	
-90	0.30	0.35	0.39	0.45	0.50	0.56	0.62	0.69	0.75	0.72	0.68	0.64	0.60	0.55	0.51	0.50	0.49	0.48	
-80	12.9	12.4	11.5	10.5	9.32	8.31	6.57	5.38	4.50	3.52	2.92	2.55	2.20	1.73	1.28	1.05	0.88	0.48	
-70	88.9	86.7	82.8	76.1	68.8	60.3	51.0	41.0	30.3	20.5	11.8	6.20	4.78	3.48	2.58	1.64	1.05	0.48	
-60	267	259	248	227	199	173	144	113	86.6	63.7	43.5	26.4	12.5	5.94	3.97	2.52	1.23	0.48	
-50	550	533	507	471	419	356	295	243	184	139	94.3	58.6	32.1	12.4	5.65	3.25	1.49	0.48	
-40	1070	1012	951	874	754	633	516	411	315	236	161	99.9	55.7	26.6	7.83	4.11	1.87	0.48	
-30	1866	1794	1669	1453	1219	1002	805	622	471	329	230	150	81.1	40.6	12.5	4.89	2.15	0.48	
-20	2783	2740	2493	2086	1757	1427	1116	837	616	438	277	185	108	51.6	19.4	5.47	2.35	0.48	
-10	3309	3104	2843	2688	2226	1777	1374	1008	730	524	330	215	125	59.4	22.7	5.82	2.47	0.48	
0	3579	3373	3037	2828	2497	1965	1510	1097	782	560	352	223	127	61.7	23.5	5.93	2.51	0.48	
10	3235	3035	2820	2619	2137	1734	1337	985	714	511	321	211	122	58.6	22.1	5.80	2.48	0.48	
20	2706	2637	2355	1989	1693	1377	1081	808	590	416	263	177	104	49.3	18.4	5.44	2.36	0.48	
30	1733	1672	1557	1359	1143	950	765	591	443	308	218	142	77.5	37.3	12.2	4.85	2.16	0.48	
40	976	925	872	796	695	594	484	381	294	218	151	92.7	50.9	24.0	7.35	4.08	1.88	0.48	
50	502	483	457	423	381	326	271	224	172	127	86.2	52.9	28.7	11.7	5.57	3.28	1.51	0.48	
60	238	233	223	203	182	158	131	102	78.3	58.2	39.0	23.3	11.6	5.71	3.93	2.59	1.28	0.48	
70	75.6	74.4	71.8	67.6	62.6	56.0	46.4	37.1	27.6	18.5	11.4	5.38	4.48	3.49	2.69	1.69	1.12	0.48	
80	9.24	8.87	8.18	7.40	6.37	5.63	4.44	3.86	3.55	3.23	2.91	2.61	2.27	1.78	1.45	1.21	0.92	0.48	
90	0.33	0.28	0.22	0.21	0.21	0.21	0.27	0.34	0.41	0.43	0.45	0.47	0.51	0.56	0.60	0.56	0.52	0.48	
100	0.39	0.40	0.41	0.41	0.42	0.43	0.42	0.39	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.28	0.25	0.48
110	0.27	0.27	0.26	0.24	0.23	0.21	0.20	0.22	0.30	0.34	0.36	0.37	0.37	0.37	0.35	0.27	0.18	0.48	
120	0.73	0.71	0.67	0.62	0.57	0.50	0.43	0.36	0.29	0.24	0.19	0.26	0.34	0.36	0.33	0.25	0.17	0.48	
130	1.55	1.49	1.40	1.27	1.13	0.98	0.82	0.67	0.54	0.41	0.31	0.23	0.19	0.33	0.31	0.24	0.16	0.48	
140	2.49	2.38	2.24	2.05	1.83	1.57	1.32	1.05	0.82	0.63	0.47	0.34	0.23	0.20	0.27	0.22	0.15	0.48	
150	3.30	3.23	3.10	2.84	2.56	2.19	1.82	1.47	1.13	0.84	0.62	0.45	0.29	0.19	0.23	0.20	0.14	0.48	
160	3.60	3.60	3.59	3.39	3.07	2.67	2.20	1.75	1.35	1.02	0.71	0.48	0.32	0.21	0.20	0.17	0.13	0.48	
170	3.31	3.44	3.49	3.41	3.19	2.83	2.26	1.70	1.24	0.90	0.64	0.45	0.31	0.21	0.17	0.15	0.11	0.48	
180	2.09	1.92	1.95	1.82	1.63	1.40	1.14	0.95	0.78	0.62	0.48	0.36	0.27	0.20	0.16	0.12	0.10	0.48	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:13.9DEG
Operators:CS01
Test Date:2023-08-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.7
Humidity:38.0%
Test Distance:1.917m [K=1.0000]
Remarks: TG-213M-60W-16(3535 40K RA80 TS60)